





#### **■** Features

- · Constant Voltage + Constant Current mode output
- Circular shape PCB type design
- · Built-in active PFC function
- Function options: output adjustable via potentiometer;
   3 in 1 dimming
- Typical lifetime>50000 hours
- 5 years warranty


### Applications

- · LED bay lighting
- · LED down lighting
- LED spot lighting
- · LED mining lighting
- · LED stage lighting

### Description

HBG-240P series is a 240W AC/DC PCB type LED driver featuring the circular shape design. It operates from  $90\sim305$ VAC and offers the dual mode constant voltage and constant current output models with different rated voltage ranging between 36V and 60V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for -40 °C ~ +45 °C under free air convection. HBG-240P is equipped with various function options, such as dimming methodology, so as to provide the optimal design flexibility for LED lighting system.

### **■** Model Encoding

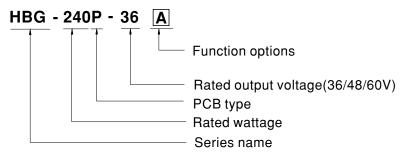

Type	Function	Note
Α	lo adjustable through built-in potentiometer.	In Stock
В	3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock




#### **SPECIFICATION**

	HBG-240P-36	HBG-240P-48	HBG-240P-60		
DC VOLTAGE	36V	48V	60V		
			36 ~ 60V		
			4.0A		
			240W		
			350mVp-p		
THI I LE G HOIDE (Max.) Hote.5			000mvp p		
CURRENT ADJ. RANGE					
VOLTAGE TOLEDANCE Note 4					
	111				
,					
TIOLD OF TIME (Typ.)	,				
VOLTAGE RANGE Note.5	E DANCE Note E				
EDECHENOV DANCE	(Please refer to "STATIC CHARACTERISTIC" section)				
FREQUENCY RANGE					
POWER FACTOR	PF ≥ 0.98/115VAC, PF ≥ 0.94/230VAC, PF ≥ 0.9/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)				
TOTAL HARMONIC DISTORTION					
EFFICIENCY (Typ.)	92.5%	93%	93.5%		
AC CURRENT	2.8A / 115VAC 1.4A / 230VAC 1.	.2A / 277VAC			
INRUSH CURRENT(Typ.)	COLD START 75A(twidth=680µs measured at 50% Ipeak) at 230VAC; Per NEMA 410				
MAX. No. of PSUs on 16A CIRCUIT BREAKER	2 units (circuit breaker of type B) / 3 units (circuit breaker of type C) at 230VAC				
LEAKAGE CURRENT	<0.75mA/277VAC				
OVER CURRENT	95 ~ 108%				
SHORT CIRCUIT					
OVER VOLTAGE	•	52 ~ 63V	62 ~ 85V		
	Shut down and latch off o/p voltage, re-pow	ver on to recover			
OVER TEMPERATURE Note.12					
WORKING TEMP.					
WORKING HUMIDITY	20 ~ 95% RH non-condensing				
STORAGE TEMP., HUMIDITY	•				
TEMP. COEFFICIENT	·				
VIBRATION					
SAFETY STANDARDS	UL8750,CSA C22.2 No.250.13-12; ENEC EN61347-1,EN61347-2-13,EN62384, GB19510.1,GB19510.14,EAC TP TC 004 approved				
WITHSTAND VOLTAGE					
	Compliance to EN55015, EN61000-3-2 Class C (@load ≧75%) ; EN61000-3-3, GB17743, GB17625.1, EAC TP TC 020				
	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, light industry level(surge immunity:Line-Earth:4KV,Line-Line:2KV), EAC TP TC 020				
	( - /				
	·				
1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.  2. Please refer to "DRIVING METHODS OF LED MODULE".  3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  4. Tolerance: includes set up tolerance, line regulation and load regulation.  5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.  6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.  7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.  8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.  9. This series meets the typical life expectancy of >50,000 hours of operation when Ta is about 45°C or less.  10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com  11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).					
	RATED CURRENT RATED POWER Note.5 RIPPLE & NOISE (max.) Note.3 CURRENT ADJ. RANGE VOLTAGE TOLERANCE Note.4 LINE REGULATION LOAD REGULATION SETUP, RISE TIME Note.6 HOLD UP TIME (Typ.)  VOLTAGE RANGE Note.5 FREQUENCY RANGE POWER FACTOR  TOTAL HARMONIC DISTORTION EFFICIENCY (Typ.) AC CURRENT INRUSH CURRENT(Typ.) MAX. No. of PSUs on 16A CIRCUIT BREAKER LEAKAGE CURRENT OVER CURRENT SHORT CIRCUIT  OVER VOLTAGE OVER TEMPERATURE Note.12 WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS WITHSTAND VOLTAGE ISOLATION RESISTANCE EMC EMISSION EMC IMMUNITY MTBF DIMENSION PACKING 1. All parameters NOT special 2. Please refer to "DRIVINGIM" 3. Ripple & note are readed up 4. Tolerance: includes set up 5. De-rating may be needed up 6. Length of set up time is med 7. The driver is considered as complete installation, the fin 8. To fulfill requirements of the connected to the mains. 9. This series meets the typica 10. Please refer to the warrant 11. The ambient temperature of 12. All functional testing must be 12. All functional testing must be	DC VOLTAGE  CONSTANT CURRENT REGION Note:2 21.6 ~ 36V  RATED POWER RATED POWER ROTE:  CURRENT ADJ. RANGE  VOLTAGE TOLERANCE Note:3 250m/p-p  Adjustable for A-Type only (via built-in pote 4.0 ~ 6.7A  VOLTAGE TOLERANCE Note:4 12.0%  LINE REGULATION  ETUP, RISE TIME Note:6 10AD REGULATION  SETUP, RISE TIME Note:6 10AD REGULATION  SETUP, RISE TIME Note:6 10AD REGULATION  VOLTAGE RANGE  Note:5 15 FREQUENCY RANGE  POWER FACTOR  POWER FAC	DC VOLTAGE		




#### ■ BLOCK DIAGRAM

fosc: 100KHz

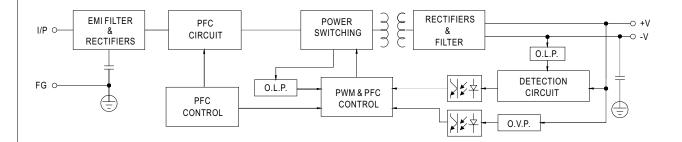

#### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

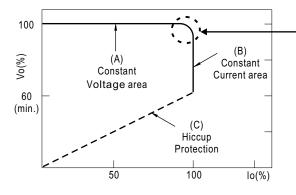


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.

#### **■ DIMMING OPERATION**

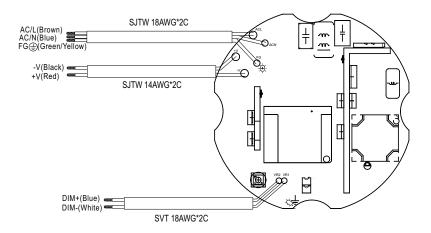


#### ※ 3 in 1 dimming function (for B-Type)


- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 1 ~ 10VDC

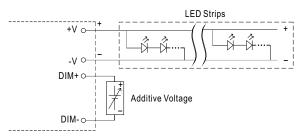


"DO NOT connect "DIM- to -V"



O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

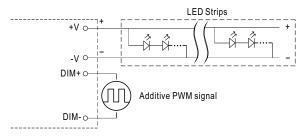


"DO NOT connect "DIM- to -V"







#### Applying additive resistance:

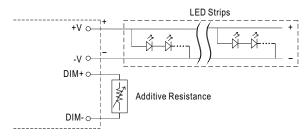

"DO NOT connect "DIM- to -V"




Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

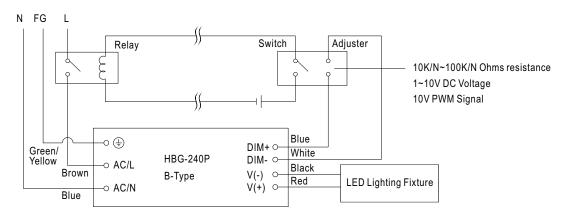


Using a switch and relay can turn ON/OFF the lighting fixture.

# ■ OUTPUT LOAD vs TEMPERATURE

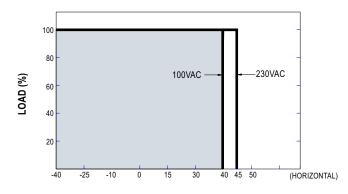


AMBIENT TEMPERATURE, Ta (°C)

#### ■ STATIC CHARACTERISTIC

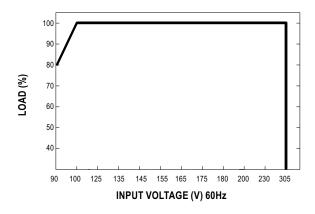


※ De-rating is needed under low input voltage.

#### ■ POWER FACTOR (PF) CHARACTERISTIC

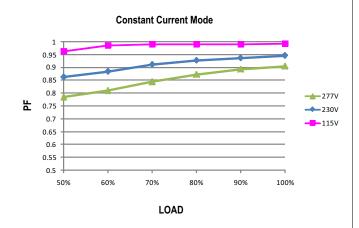

#### ■ TOTAL HARMONIC DISTORTION (THD)

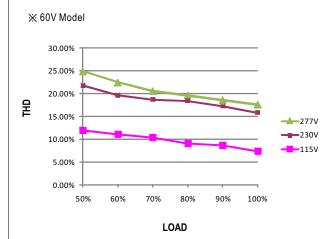

#### **■** EFFICIENCY vs LOAD

HBG-240P series possess superior working efficiency that up to 93.5% can be reached in field applications.

**※** 60V Model

