



Features

- Constant Voltage + Constant Current mode output
- Protection Functions: OCP,SCP,OVP,OTP
- IP67 rating for indoor or outdoor installations
- Output adjustable via potentiometer
- Typical lifetime>50000 hours
- 5 years warranty


Applications

- LED bay lighting
- LED stage lighting
- LED flood lighting
- LED strip lighting
- DMX control system

Description

ELG-300 series is a 300W LED driver featuring with constant current and Constant voltage mode design. ELG-300 operates from 100~305VAC and offers CV mode or CC mode applications. Thanks to the high efficiency up to 94%, with the fanless design, the ambient temperature can be operated for -40℃~+85℃ case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world ,as to provide the optimal design flexibility for LED lighting system.

Model Encoding

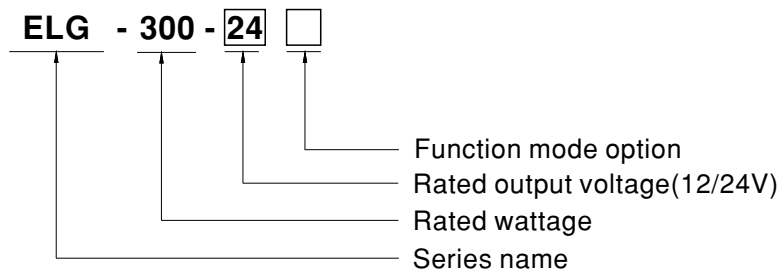

Type	IP Level	Function	Note
A	IP67	Io and Vo adjustable through built-in potentiometer	In Stock




300W Constant Voltage + Constant Current LED Driver

ELG-300

SPECIFICATION


MODEL		ELG-300-12A	ELG-300-24A
OUTPUT	DC VOLTAGE	12V	24V
	CONSTANT CURRENT REGION Note.2	10 ~ 12V	14.4 ~ 24V
	RATED CURRENT	200VAC ~ 305VAC	22A
		100VAC ~ 180VAC	12.5A
	RATED POWER	200VAC ~ 305VAC	10.63A
		100VAC ~ 180VAC	264W
	RIPPLE & NOISE (max.) Note.3	224.4W	300W
	VOLTAGE ADJ. RANGE	150mVp-p	240mVp-p
	CURRENT ADJ. RANGE	11.2 ~ 12.8V	22.4 ~ 25.6V
	VOLTAGE TOLERANCE Note.4	11 ~ 22A	6.25 ~ 12.5A
	LINE REGULATION	±3.0%	±2.0%
	LOAD REGULATION	±0.5%	±0.5%
INPUT	SETUP, RISE TIME Note.6	±2.0%	±1.0%
	HOLD UP TIME (Typ.)	500ms, 100ms/230VAC, 500ms, 100ms/115VAC	
	VOLTAGE RANGE Note.5	10ms/230VAC 10ms/115VAC	
	FREQUENCY RANGE	100 ~ 305VAC 142 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)	
	POWER FACTOR	47 ~ 63Hz	
	TOTAL HARMONIC DISTORTION	PF ≥ 0.95/115VAC, PF ≥ 0.93/230VAC, PF ≥ 0.90/277VAC@full load	
	EFFICIENCY (Typ.)	THD < 10% (@load ≥ 50%/115VAC, 230VAC; @load ≥ 75%/277VAC)	
	AC CURRENT	91%	94%
	INRUSH CURRENT(Typ.)	3A / 115VAC 1.6A / 230VAC 1.3A/277VAC	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	COLD START 45A(twidth=1200μs measured at 50% Ipeak) at 230VAC; Per NEMA 410	
PROTECTION	OVER CURRENT	2 units (circuit breaker of type B) / 4 units (circuit breaker of type C) at 230VAC	
	SHORT CIRCUIT	<0.75mA / 277VAC	
	OVER VOLTAGE	95 ~ 108%	
	OVER TEMPERATURE	Constant current limiting, recovers automatically after fault condition is removed	
		Constant current limiting, recovers automatically after fault condition is removed	
ENVIRONMENT	WORKING TEMP.	13.5 ~ 17V	27 ~ 34V
	MAX. CASE TEMP.	Shut down output voltage, re-power on to recover	
	WORKING HUMIDITY	Shut down output voltage, re-power on to recover	
	STORAGE TEMP., HUMIDITY	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)	
	TEMP. COEFFICIENT	Tcase=+85°C	
	VIBRATION	20 ~ 95% RH non-condensing	
SAFETY & EMC	SAFETY STANDARDS	-40 ~ +80°C, 10 ~ 95% RH	
	WITHSTAND VOLTAGE	±0.03%/°C (0 ~ 60°C)	
	ISOLATION RESISTANCE	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
	EMC EMISSION	UL8750(type"HL")(Except for 12V), CSA C22.2 No. 250.13-12; ENEC EN61347-1, EN61347-2-13 independent, EN62384; EAC TP TC 004; GB19510.1, GB19510.14; KC61347-1, KC61347-2-13; IS15885(Part2/Sec13), IP67 approved	
	EMC IMMUNITY	I/P-O/P:3.75KVAC I/P-FG:2.0KVAC O/P-FG:1.5KVAC	
OTHERS	MTBF	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH	
	DIMENSION	Compliance to EN55015, EN61000-3-2 Class C (@load ≥ 50%); EN61000-3-3; KN15	
	PACKING	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; EN61547, light industry level (surge immunity Line-Earth 6KV, Line-Line 4KV), KN61547	
NOTE	MTBF	609K hrs min. Telcordia SR-332 (Bellcore); 191Khrs min. MIL-HDBK-217F (25°C)	
	DIMENSION	246*77*39.5mm (L*W*H)	
NOTE	PACKING	1.45 Kg; 9pcs /13.5Kg / 0.76CUFT	
	NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE". 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 4. Tolerance : includes set up tolerance, line regulation and load regulation. 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 8. This series meets the typical life expectancy >50,000 hours of operation when Tcase, particularly (Tc) point (or TMP, per DLC), is 70°C or less. 9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 10. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains. 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx	

■ Block Diagram

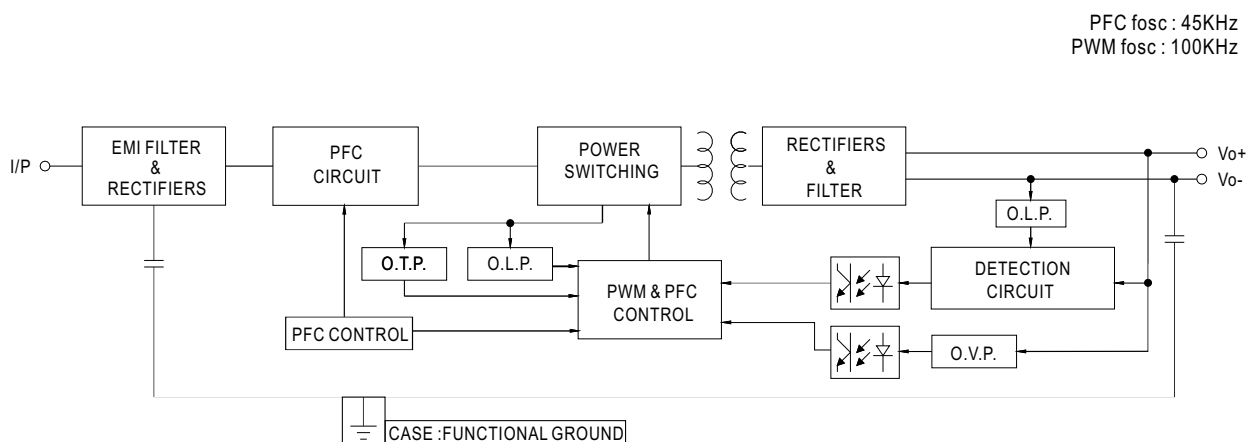

■ DRIVING METHODS OF LED MODULE


※ This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

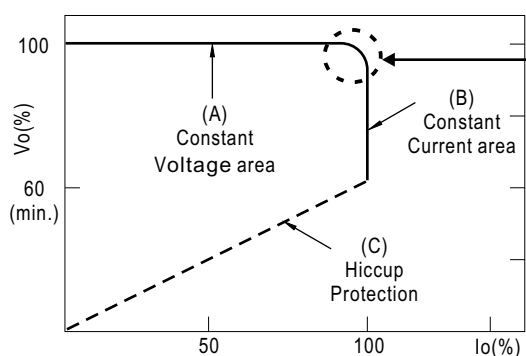

Typical output current normalized by rated current (%)


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.
Should there be any compatibility issues, please contact MEAN WELL.

OUTPUT LOAD vs TEMPERATURE

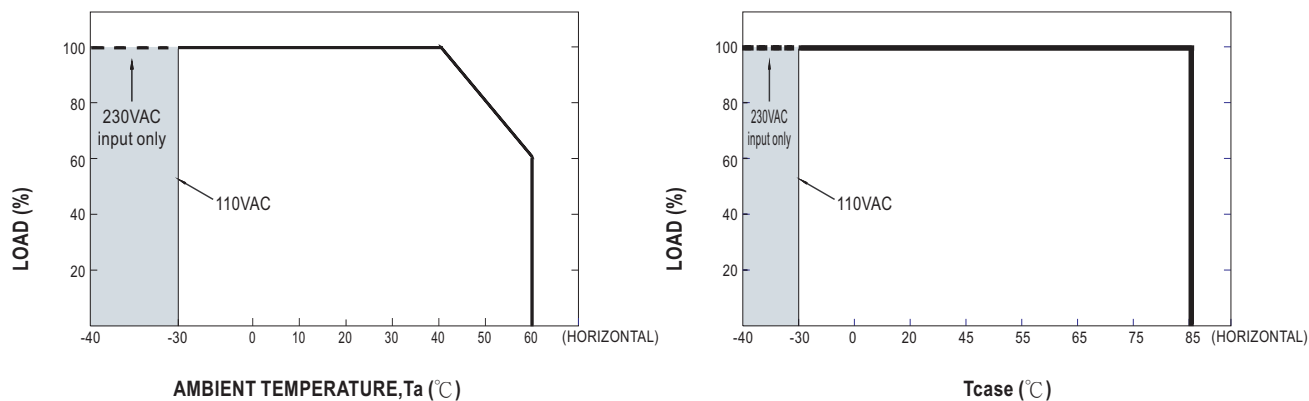

⊙ If ELG-300 operates in Constant Current mode with the rated current, the maximum workable Ta is 40°C.


STATIC CHARACTERISTIC

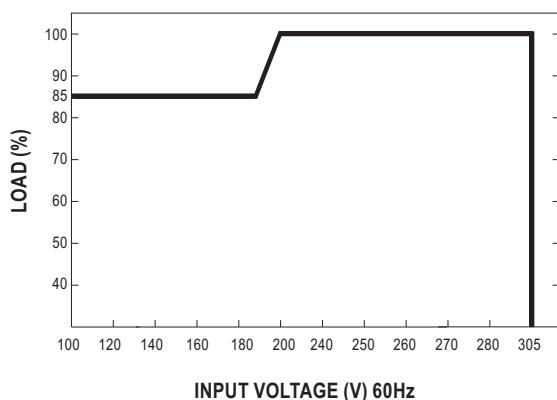

※ De-rating is needed under low input voltage.


POWER FACTOR (PF) CHARACTERISTIC

※ Tcase at 75°C

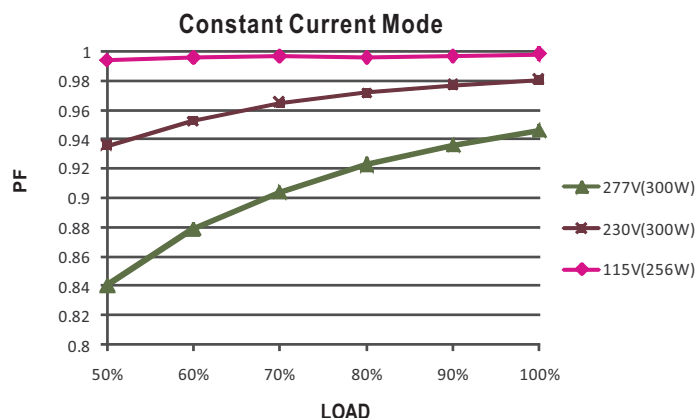

TOTAL HARMONIC DISTORTION (THD)


※ ELG-300-24A Model, Tcase at 75°C

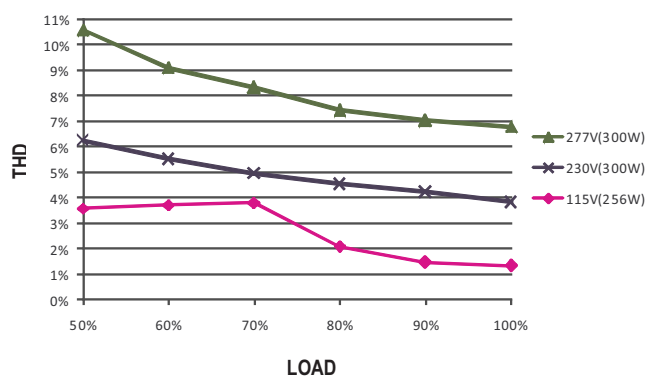


EFFICIENCY vs LOAD

ELG-300 series possess superior working efficiency that up to 94% can be reached in field applications.

※ ELG-300-24A Model, Tcase at 75°C

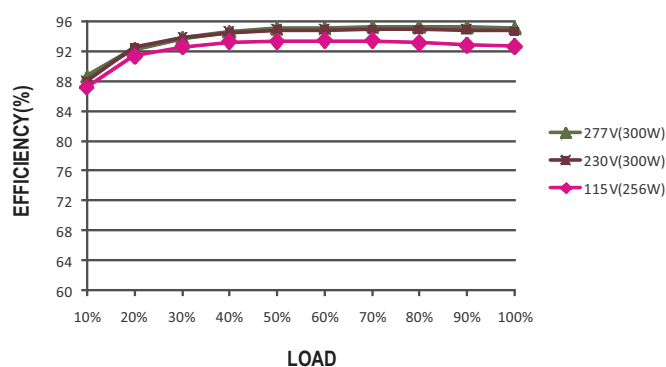


■ LIFE TIME

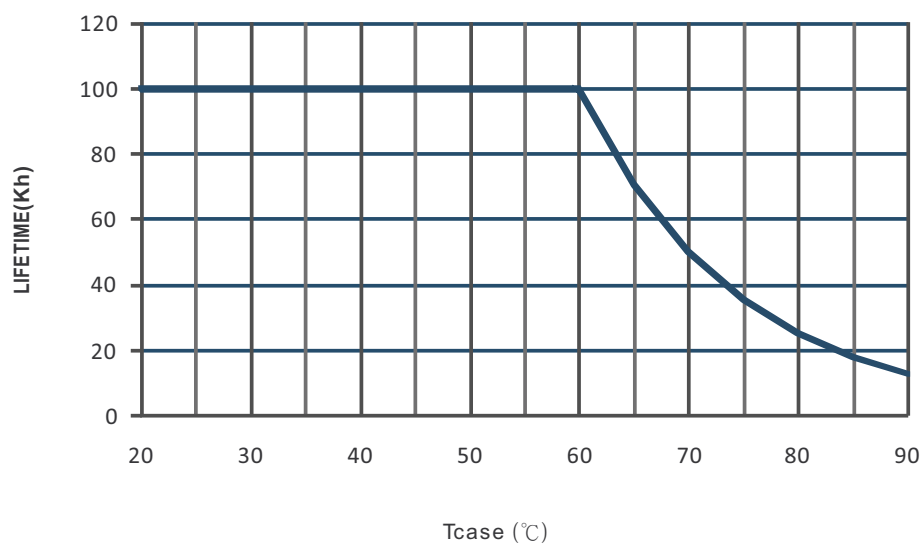


MECHANICAL SPECIFICATION

CASE NO.: 266A Unit:mm

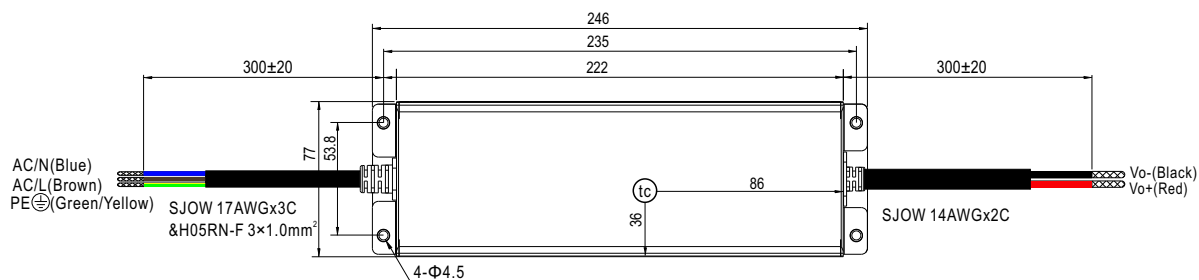

• t_c : Max. Case Temperature

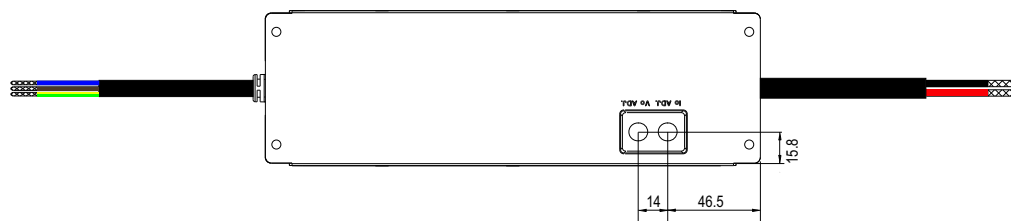

INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>