



(MPM-90)



(MPM-90-xxST)



## Features

- 3.43"x2.05" compact size
- PCB, chassis or screw terminal mounting version
- Medical safety approved (2 x MOPP) according to ANSI/AAMI ES60601-1 and IEC/EN60601-1
- Suitable for BF application with appropriate system consideration
- No load power consumption < 0.1W
- Extremely low leakage current
- Wide operating temp. range -30 ~ +80°C
- EMI Class B without additional components
- Isolation Class II
- Protections: Short circuit / Overload / Over voltage
- No minimum load required
- Operating altitude up to 4000 meters (Note.7)
- 100W peak (10 sec.)
- 3 years warranty


## Applications

- Portable medical device
- Mobile clinical workstation
- Medical computer monitor
- Medical examination instrument

## Description

MPM-90 is a 90W high density and small size (87x52x29.5mm) AC/DC PCB-mount module type medical grade power supply. It features the operation for 80~264VAC, a low no load power consumption less than 0.1W, a high efficiency up to 93%, Class II (no FG) double insulation, outstanding dissipation, 2~5G anti-vibration by model, high EMC performance, 4KVAC isolation, etc. The design observes IEC/EN60601-1 and ANSI/AAMI ES60601-1 version three with 2 x MOPP level and ultra-low leakage current (<100μA). It is very suitable for BF (patient contact) type medical device or relevant equipment.


## Model Encoding

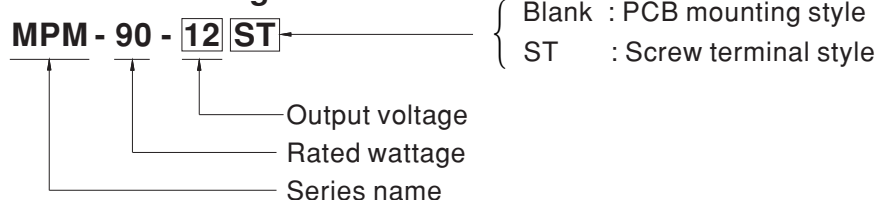


**SPECIFICATION**

MODEL		MPM-90-12 <input type="checkbox"/>		MPM-90-15 <input type="checkbox"/>		MPM-90-24 <input type="checkbox"/>		MPM-90-48 <input type="checkbox"/>		
OUTPUT	DC VOLTAGE		12V		15V		24V		48V	
	CURRENT	Peak(10 sec.)	7.37A		6.23A		4.13A		2.07A	
		Convection	6.7A		5.67A		3.75A		1.88A	
	RATED POWER	Peak(10 sec.) <small>Note.2</small>	88.4W		93.5W		99W		99.2W	
		Convection	80.4W		85.05W		90W		90.2W	
	RIPPLE & NOISE (max.) <small>Note.3</small>		120mVp-p		150mVp-p		200mVp-p		240mVp-p	
	VOLTAGE TOLERANCE <small>Note.4</small>		± 2.0%		± 2.0%		± 2.0%		± 2.0%	
	LINE REGULATION		± 0.5%		± 0.5%		± 0.5%		± 0.5%	
	LOAD REGULATION		± 1.0%		± 0.5%		± 0.5%		± 0.5%	
SETUP, RISE TIME		1000ms, 30ms/230VAC		1000ms, 30ms/115VAC at full load						
HOLD UP TIME (Typ.)		30ms/230VAC		10ms/115VAC at full load						
INPUT	VOLTAGE RANGE <small>Note.5</small>		80 ~ 264VAC    113 ~ 370VDC							
	FREQUENCY RANGE		47 ~ 63Hz							
	EFFICIENCY (Typ.)		92%		92.5%		93%		93%	
	AC CURRENT (Typ.)		1.9A/115VAC    1.1A/230VAC							
	INRUSH CURRENT (Typ.)		COLD START    30A/115VAC    65A/230VAC							
	LEAKAGE CURRENT (max.) <small>Note.6</small>		Touch current <100μA/264VAC							
PROTECTION	OVERLOAD		115% ~ 160% rated output power							
			Protection type : Hiccup mode, recovers automatically after fault condition is removed							
	OVER VOLTAGE		12.6 ~ 16.2V		15.8 ~ 20.3V		25.2 ~ 32.4V		50.4 ~ 64.8V	
			Protection type : Shut down o/p voltage, re-power on to recover							
OVER TEMPERATURE		Protection type : Shut down o/p voltage, re-power on to recover								
ENVIRONMENT	WORKING TEMP.		-30 ~ +80°C (Refer to "Derating Curve")							
	WORKING HUMIDITY		20 ~ 90% RH non-condensing							
	STORAGE TEMP.		-40 ~ +85°C							
	TEMP. COEFFICIENT		± 0.03%/°C (0 ~ 50°C)							
	SOLDERING TEMPERATURE		260°C ± 5°C/10sec.max.							
	VIBRATION		Blank:10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes							
			ST:10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes							
	OPERATING ALTITUDE <small>Note.7</small>		4000 meters / OVC II							
SAFETY & EMC (Note 8)	SAFETY STANDARDS		IEC60601-1, EN60601-1, EAC TP TC 004, UL ANSI/AAMI ES60601-1(3.1 version), CAN/CSA-C22 3 <sup>rd</sup> Edition approved; Design refer to EN60335-1(by request)							
	ISOLATION LEVEL		Primary-Secondary: 2xMOPP							
	WITHSTAND VOLTAGE		I/P-O/P:4KVAC							
	ISOLATION RESISTANCE		I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH							
	EMC EMISSION		Parameter		Standard		Test Level / Note			
			Conducted		EN55011 (CISPR11)		Class B			
			Radiated		EN55011 (CISPR11)		Class B			
			Harmonic Current		EN61000-3-2		Class A			
			Voltage Flicker		EN61000-3-3		-----			
	EMC IMMUNITY		EN60601-1-2							
			Parameter		Standard		Test Level / Note			
			ESD		EN61000-4-2		Level 4, 15KV air ; Level 4, 8KV contact			
			RF field susceptibility		EN61000-4-3		Level 3, 10V/m( 80MHz~2.7GHz ) Table 9, 9~28V/m( 385MHz~5.78GHz )			
			EFT bursts		EN61000-4-4		Level 3, 2KV			
			Surge susceptibility		EN61000-4-5		Level 3, 1KV/Line-Line			
			Conducted susceptibility		EN61000-4-6		Level 3, 10V			
			Magnetic field immunity		EN61000-4-8		Level 4, 30A/m			
Voltage dip, interruption			EN61000-4-11		>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods					
OTHERS			MTBF		570.5Khrs min.    MIL-HDBK-217F (25°C);		1514.81Khrs min.    Telcordia TR/SR-332 (Bellcore) (25°C)			
		DIMENSION		PCB mounting style : 87*52*29.5mm (L*W*H)		Screw terminal style : 109*52*33.5mm (L*W*H)				
		PACKING		PCB mounting style : 0.197Kg;60pcs/12.8Kg/0.97CUFT		Screw terminal style :0.219Kg;50pcs/12Kg/0.55CUFT				
NOTE		1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. 33% Duty cycle maximum within every 30 seconds. Average output power should not exceed the rated power. 3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ f & 47 μ f parallel capacitor. 4. Tolerance : includes set up tolerance, line regulation and load regulation. 5. Derating may be needed under low input voltages. Please check the derating curve for more details. 6. Touch current was measured from primary input to DC output. 7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 8. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> )								


### ■ Block Diagram

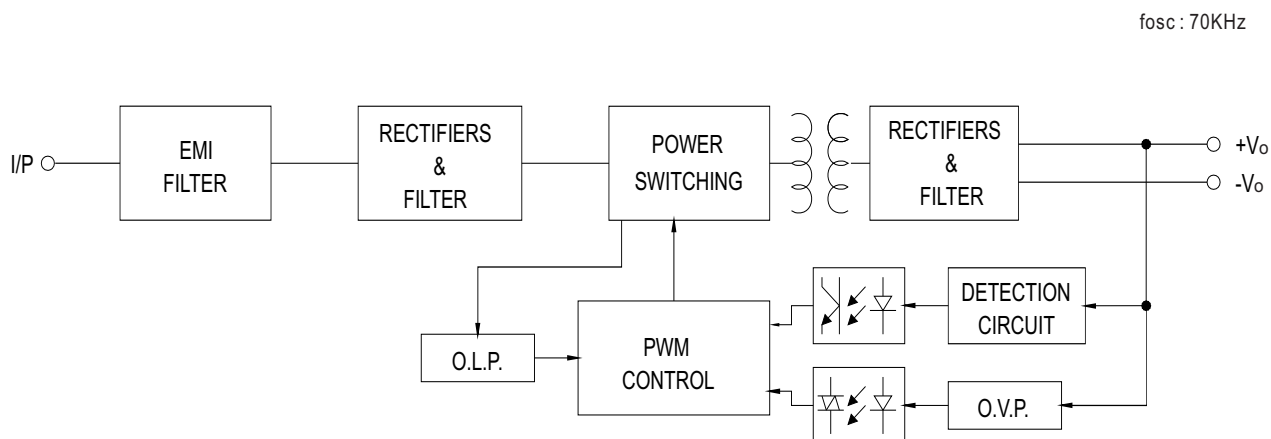

### ■ Derating Curve

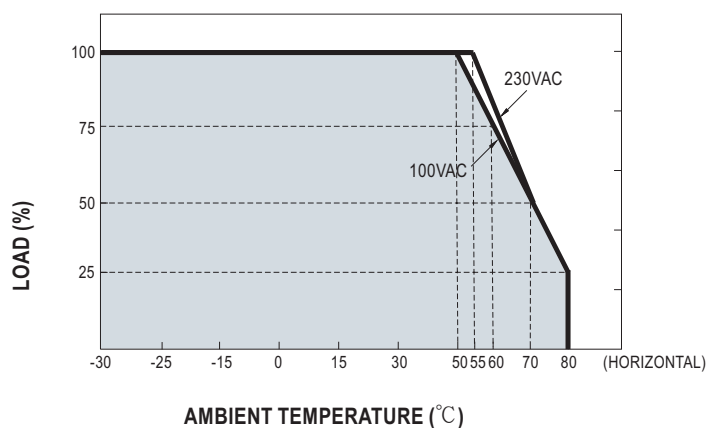


### ■ Output Derating VS Input Voltage

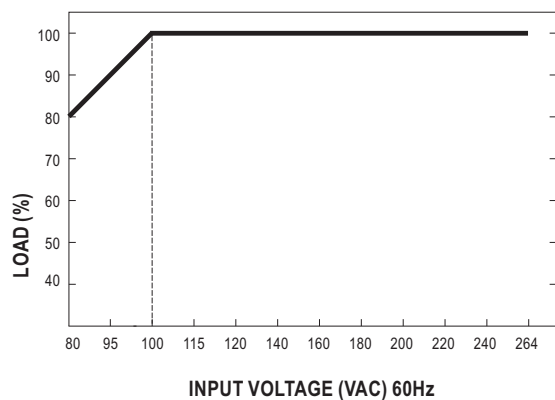


Case No. IRM60 Unit:mm

## Mechanical Specification

### PCB mounting style (MPM - 90)

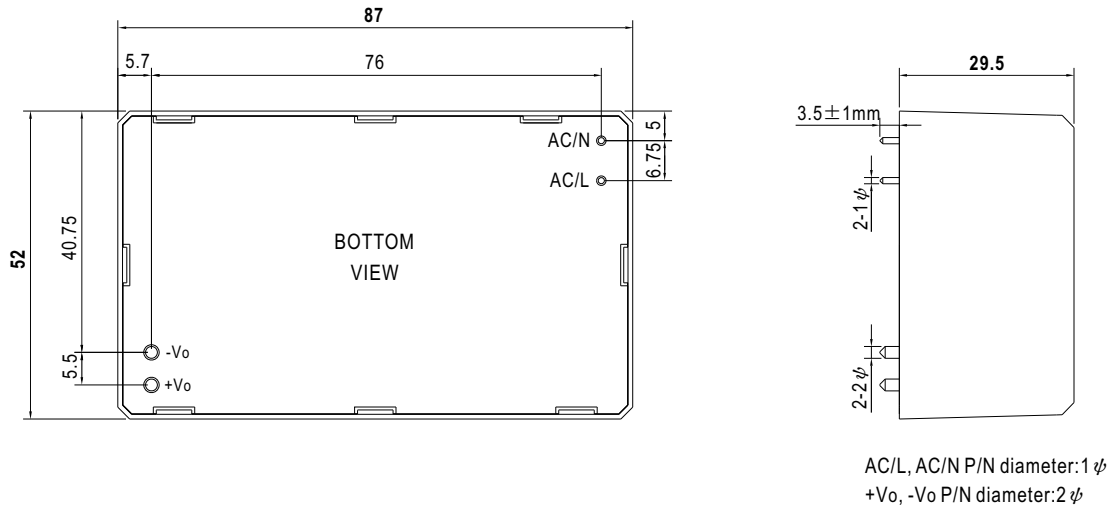

### Screw terminal style (MPM-90-xxST)

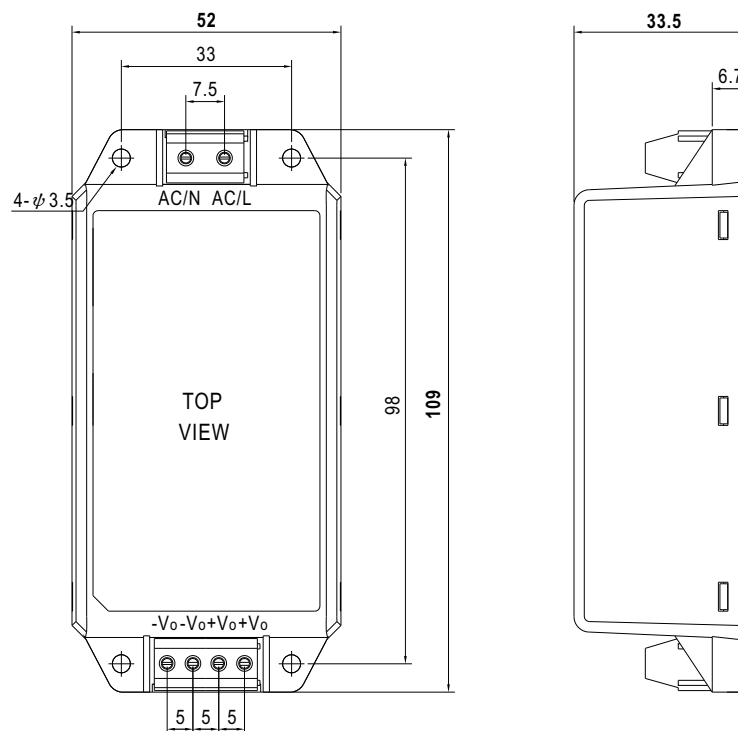

## Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>