

## DH Axial Type, Standard Series

- High Power Density
- Rapid charge and discharge
- Ultra-low internal resistance





Item	Characteristics	
Operating temperature range	-40 ~ +65°C	
Rated Voltage	2.7 VDC	
Capacitance tolerance	0% ~ +20%	
Temperature characteristics	Capacitance change	Within $\pm 5\%$ of initial value at +20°C
	Internal resistance change	Within 100% of initial value at +20°C
Endurance (65°C)	Test time	1500 hours
	Capacitance change	Within $\pm 20\%$ of specified value
	Internal resistance change	Less than 100% of specified value
Shelf life (65°C)	After 1500 hours no load test same as endurance	
Life Time at RT <sup>(1)</sup>	10 years	(1) $I \Delta C I < 20\%$ and $\Delta ESR < 100\%$ of specified value, respectively and $LC < \text{specified value}$
Cycle Life (25°C) <sup>(1)(2)</sup>	1,000,000 cycles	(2) Cycle : between rated voltage and half rated voltage under constant current at 25°C

### DRAWING


Unit : mm

#### Threaded Type

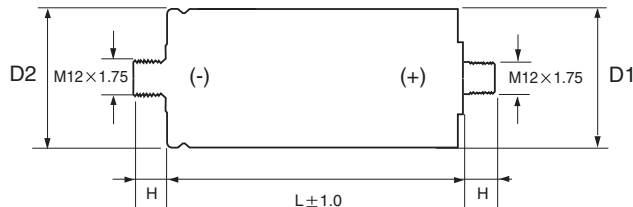

Size (mm)		
H	D1	D2
( $\pm 0.2$ )	( $\pm 0.2$ )	( $\pm 0.5$ )
13.0	$\varnothing 60.4$	$\varnothing 60.7$

#### Weldable Type

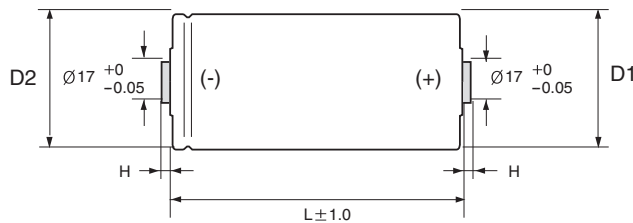

Size (mm)		
H	D1	D2
( $\pm 0.2$ )	( $\pm 0.2$ )	( $\pm 0.5$ )
3.0	$\varnothing 60.4$	$\varnothing 60.7$

### CHARACTERISTIC LIST & DIMENSIONS

Rated Voltage	Capacitance (F)	ESR, 1KHz (mΩ)	ESR, DC (mΩ)	LC (72hr) (mA)	Max Continuous Current(A)		Max Peak Current(A)	Specific Energy		Weight (g)	Volume (ml)	Dimension $\varnothing D \times L$ (mm)
					$\Delta T=15^\circ\text{C}$	$\Delta T=40^\circ\text{C}$		(Wh/kg)	(Wh/L)			
2.7	1200	0.30	0.33	2.7	98	159	1160	4.05	5.73	300	212	60.4 × 74
	1600	0.25	0.28	3.0	115	188	1492	4.76	6.65	340	244	60.4 × 85
	2000	0.24	0.27	4.0	126	206	1753	5.06	6.93	400	292	60.4 × 102
	3000	0.20	0.23	5.0	150	245	2396	5.79	7.68	525	395	60.4 × 138
	3400	0.25	0.28	9.2	130	210	2351	6.50	8.71	530	395	60.4 × 138